


WMF COFFEE MACHINES

WMF Planning Info

combiNation Design drinking chocolate dispenser

The chocolate dispenser can be installed on the left or right of the combiNation F depending on the space available. It can only be installed on the right of the combiNation S viewed from the server side.

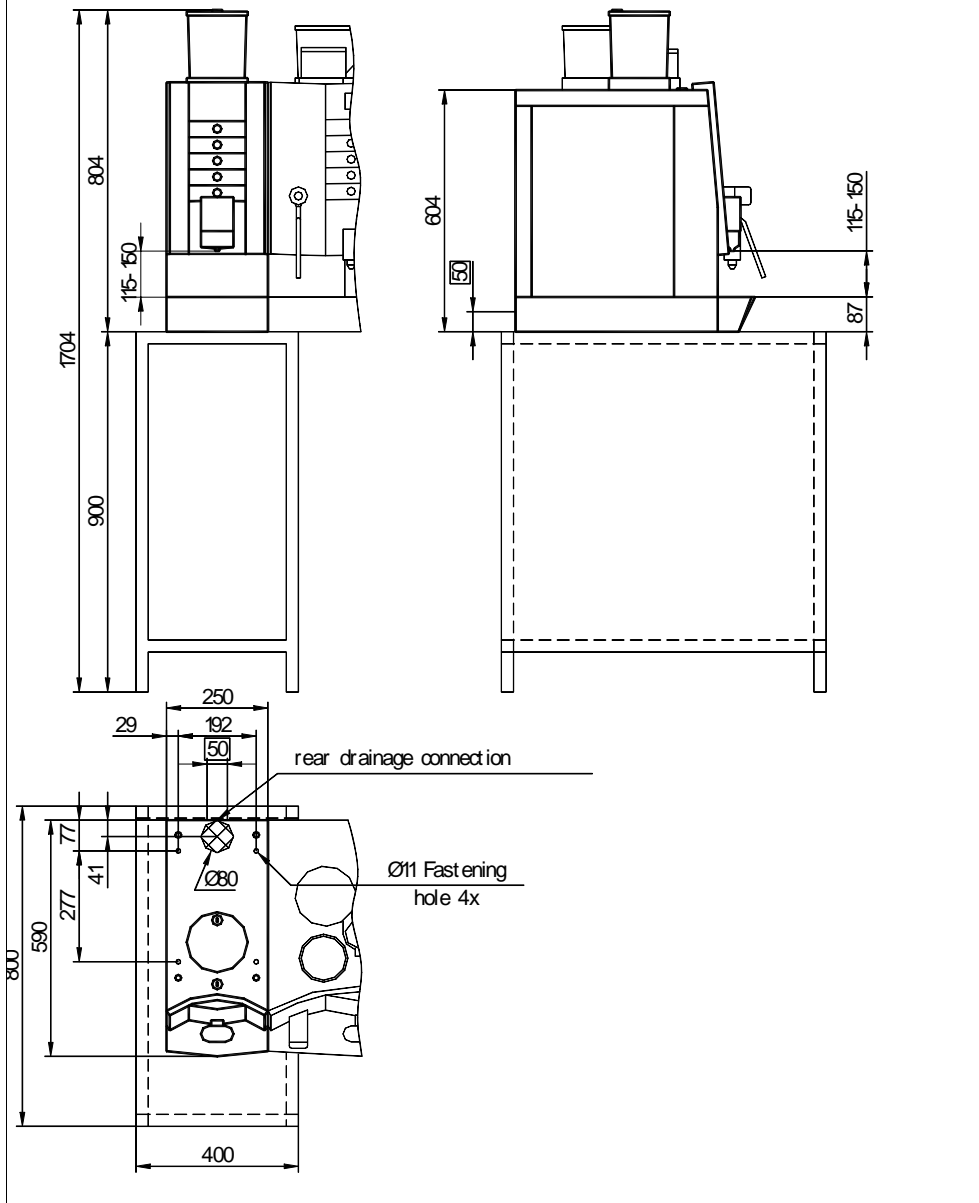

WMF COFFEE MACHINES

Data sheet for combiNation Design drinking chocolate dispenser

Type:	03 9480 0010 drinking chocolate dispenser without power and water supply, 2 dispensing buttons, suitable for combiNation S and F 03 9480 0030 drinking chocolate dispenser , without power and water supply, lockable , 2 dispensing buttons, suitable for combiNation S and F , (equipped with the existing side parts of the combiNation)
	Design rear panels in basic, aluminium, beech or anthracite design on request
Capacity:	Chocolate powder container ca. 2 kg
Degree of protection:	IPX0
Protection class:	Protection class I
Perceptible heat emission:	0.04 kWh/h in standby mode
Perceptible heat emission:	0.07 kWh/h in maximum mode
Miscellaneous:	Depending on local conditions the chocolate dispenser can be installed either left or right of the combiNation F . It can only be installed on the right of the combiNation S only viewed from the server side.
Empty weight:	17 kg

Electrical connection:	<p>The following specifications for the electrical connection and the cited standards are applicable for connecting machines in EU countries. If applicable, additional national regulations must be observed. Outside the EU the acceptance of the cited standards must be checked by the persons who market the machines.</p> <p>The building electrical system must comply with IEC 364. For increased safety the device should be protected by an earth-leakage circuit breaker with 30 mA rated fault current (EN 61008). A standard single-phase electrical outlet or a standard 5-pin three-phase electrical outlet complying with EN 60309 must be installed near the device or 30 cm below the top of the counter on the back or side of the counter. If the power connection cord of this device has been damaged, it must be replaced by our customer service or by a similarly qualified person. If the machine is permanently connected to the building power supply, a circuit breaker that disconnected all poles (main switch) in accordance with EN 60947 must be installed with at least 3 mm contact separation must be installed to protect the machine; the disconnecting device is recommended for a flexible connection. The power cord must not be in contact with hot objects. The main switch and the electrical outlet are part of the building installation. The machine must not be installed with a fixed building connection when used with a trolley (mobile station).</p>
Installation clearances:	<p>For the installation a minimum clearance of 50 mm to the back wall and at the sides to walls or other non-WMF equipment is required for functional, service and safety reasons. A clear height of 1100 mm from the top of the installation area is required. The height of the installation area from the top of the floor should be at least 700 mm and a maximum of 900 mm. Installation of accessories underneath the unit (such as water filter or sediment separator) requires a clearance of 550 and 695 mm, depending on the configuration and the local installation conditions.</p> <p>If the connections of the machine are down through the counter, please also consider the space required by the connection lines, which may restrict the usable space in the substructure.</p>

