


# WMF COFFEE MACHINES


## WMF Planning Info

### Cream/sugar dispenser combination Design

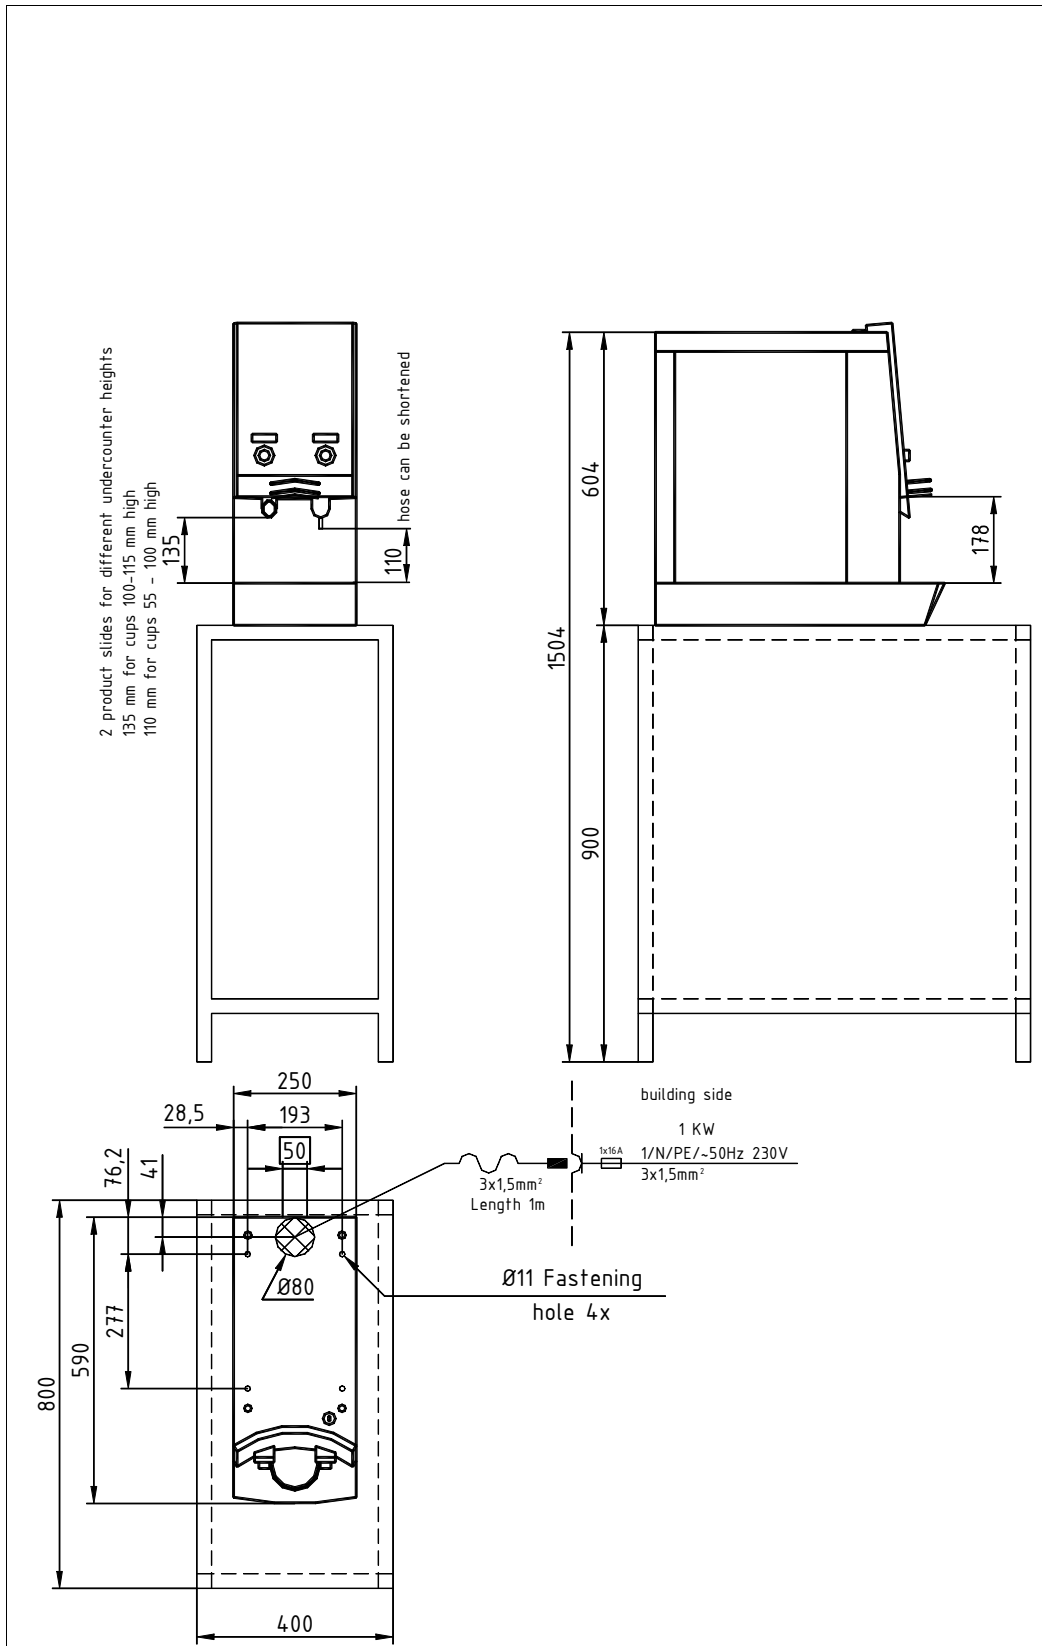

# WMF COFFEE MACHINES

## Data sheet for cream/sugar dispenser combiNation Design
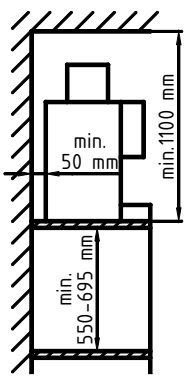
<b>Type:</b>	<b>03 9475 0002 cream/sugar dispenser</b> , 1 / N / PE, 50 Hz, 230V, 0.05 kW, building fuse protection 16 A, 1 output button each for dispensing sugar or cream, <b>suitable for combiNation S, S4, F and F2</b> (equipped with the existing side parts of the combiNation)
	Design rear panels in basic, aluminium, beech or anthracite design on request
<b>Capacity:</b>	Cream tank: 4.5 L condensed milk Sugar container: 2 kg sugar (granular sugar)
<b>Degree of protection:</b>	IPX0
<b>Protection class:</b>	I
<b>Perceptible heat emission:</b>	0.005 kWh/h in standby mode
<b>Perceptible heat emission:</b>	0.05 kWh/h in maximum mode
<b>Continuous sound pressure level (L<sub>pa</sub>)</b>	< 70 dB (A)
<b>Miscellaneous:</b>	Lockable front doors, integrated drip tray without drain, utensil gallery for sweetener containers
<b>Empty weight:</b>	22 kg
<b>Installation clearances:</b>	<p>For the installation a minimum clearance of 50 mm to the back wall and at the sides to walls or other non-WMF equipment is required for functional, service and safety reasons. A clear height of 1100 mm from the top of the installation area is required. The height of the installation area from the top of the floor should be at least 700 mm and a maximum of 900 mm. Installation of accessories underneath the unit (such as water filter or sediment separator) requires a clearance of 550 and 695 mm, depending on the configuration and the local installation conditions.</p> <p>If the connections of the machine are down through the counter, please also consider the space required by the connection lines, which may restrict the usable space in the substructure.</p> 
<b>Electrical connection:</b>	<p>The following specifications for the electrical connection and the cited standards are applicable for connecting machines in EU countries. If applicable, additional national regulations must be observed. Outside the EU the acceptance of the cited standards must be checked by the persons who market the machines.</p> <p>The building electrical system must comply with IEC 364. For increased safety the device should be protected by an earth-leakage circuit breaker with 30 mA rated fault current (EN 61008). A standard electrical outlet compliant with EN 60309 must be installed near the device or 30 cm below the top of the counter at the back or side of the undercounter structure for a single-phase connection. If the power connection cord of this device has been damaged, it must be replaced by our customer service or by a similarly qualified person. The power cord must not be in contact with hot objects. The electrical outlet is part of the building installation.</p>